


# ONTEC C

round luminaire, IP20


anti-panic lighting, escape route lighting

## PARAMETERS

- » **Dedicated to suspended ceiling** – recessed mounted luminaire
- » Easy installation
- » **Minimalism** - discreet round shape with 9 cm diameter
- » Thanks to lenses options luminaire can be used as a emergency lighting were light distribution requirements are differential:
  - » M version – open space area (anti panic light)
  - » C version – evacuation route lighting (corridor lens)

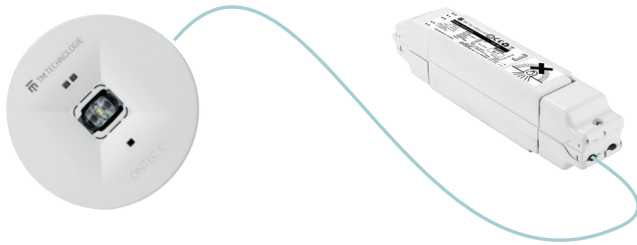

## ASSEMBLY

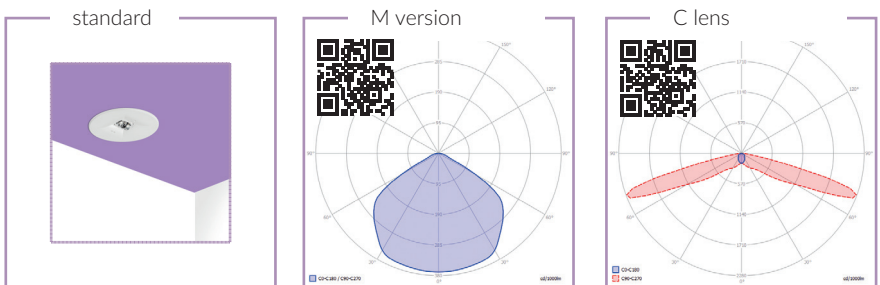

Code	Operating Mode	Active Power W	Lumen Output lm	Battery
ONTEC C M1 180 NM ST	NM	1,2	167	LiFePO4/C 3.2V 1.5Ah
ONTEC C M2 302 M ST	M/NM	7	288	LiFePO4/C 6.4V 1.5Ah
ONTEC C M2H 303 M ST	M/NM	8,6	393	LiFePO4/C 6.4V 3.0Ah
ONTEC C M1 CB	M/NM	4,5	338	
ONTEC C M1 CBA	M/NM	5,5	338	
ONTEC C C1 180 NM ST	NM	1,2	140	LiFePO4/C 3.2V 1.5Ah
ONTEC C C1 302 M ST	M/NM	7	260	LiFePO4/C 6.4V 1.5Ah
ONTEC C C1H 303 M ST	M/NM	8,6	353	LiFePO4/C 6.4V 3.0Ah
ONTEC C C1 CB	M/NM	4,5	297	
ONTEC C C1 CBA	M/NM	5,5	297	