


# TM.INDUST N M2 302 M DALI COLD



Catalog number	TM-IN.M2DAM39CW
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	DALI
Colour	RAL9003
Luminous flux	284 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	4.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	yes
Temperature range	-15-40 °C
Material	nierdzwka
Appliance classes	1
IP	IP66/69
IK	IK08
COLD	yes
Battery	LiFePO4/C 6.4V 3.0Ah
LED Lifetime	50 000 work hour
Guarantee (months)	body, electronics, light source: <ul style="list-style-type: none"> <li>• ST - 24</li> <li>• AT - 36</li> <li>• <b>DATA, DATA 2, DALI</b> - 60</li> </ul> battery: <ul style="list-style-type: none"> <li>• ST - 12</li> <li>• AT - 24</li> <li>• <b>DATA, DATA 2, DALI</b> - 24</li> </ul>
Type - DALI	A - maintained, controllable, dimmable

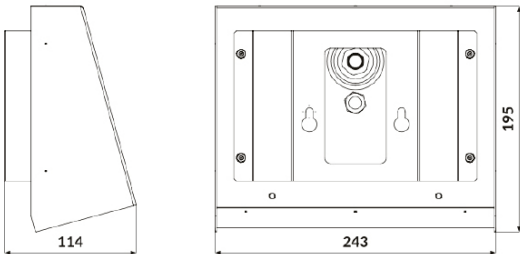