


TM.INDUST N M2 302 M ST COLD



Catalog number	TM-IN.M2STM39CW
Application	anti-panic lighting
Duration time	3 h
Operating mode	M
Version	ST – for button test
Colour	RAL9003
Luminous flux	284 lm
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	4.2 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	-15-40 °C
Material	nierdzewka
Appliance classes	1
IP	IP66/69
IK	IK08
COLD	yes
Battery	LiFePO4/C 6.4V 3.0Ah
LED Lifetime	50 000 work hour
Guarantee (months)	body, electronics, light source: <ul style="list-style-type: none"> • ST - 24 • AT - 36 • DATA, DATA 2, DALI - 60 • CB - 60 battery: <ul style="list-style-type: none"> • ST - 12 • AT - 24 • DATA, DATA 2, DALI - 24

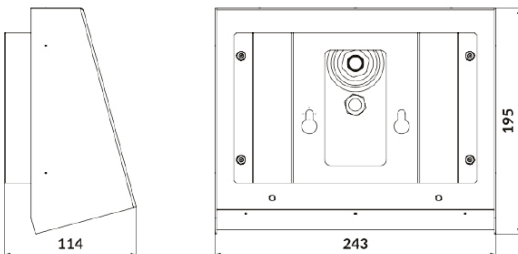