


# TM.INDUST N M2 302 M ST



|   |  |
|---|--|
| Catalog number  | TM-IN.M2STM390W  |
| Application   | anti-panic lighting  |
| Duration time   | 3 h  |
| Operating mode  | M  |
| Version   | ST – for button test   |
| Colour  | RAL9003  |
| Luminous flux   | 284 lm   |
| Maximum light power (the luminaire can power the light source with a different power) | 3 W  |
| Active power  | 4.2 W  |
| Power supply  | 210+250 V AC 50+60 Hz  |
| Power supply CB   | 186+254 V DC   |
| Dimming mode  | no   |
| Temperature range   | 5-40 °C  |
| Material  | nierdzwka  |
| Appliance classes   | 1  |
| IP  | IP66/69  |
| IK  | IK08   |
| Battery   | LiFePO4/C 6.4V 1.5Ah   |
| LED Lifetime  | 50 000 work hour   |
| Guarantee (months)  | body, electronics, light source: <ul style="list-style-type: none"> <li>• ST - 24</li> <li>• AT - 36</li> <li>• DATA, DATA 2, DALI - 60</li> <li>• CB - 60</li> </ul> battery: <ul style="list-style-type: none"> <li>• ST - 12</li> <li>• AT - 24</li> <li>• DATA, DATA 2, DALI - 24</li> </ul> |

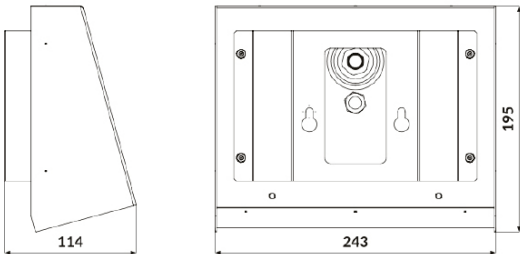