

LED EXIT LIGHTS

LED Exit lights - Indoor Application

EPE-EX6-MT-3H




Product Description

Universal Rotatable EXIT signs suitable for Wall and Ceiling application with 3 hours battery backup. EXIT written in English & Arabic pictograms included with the fitting.

Features

- Homogenized illumination
- High luminance of white contrast color >500 cd/m²
- Adjustable brightness function in mains operation
- Increased Affordance functionality with CG Line+ technology
- Lithium battery
- 3h Battery backup
- 30m viewing distance.
- Delivered with non-adhesive exit legends
- Same aesthetic either in IP20 versions
- Robust construction, IK05

Dimensions:

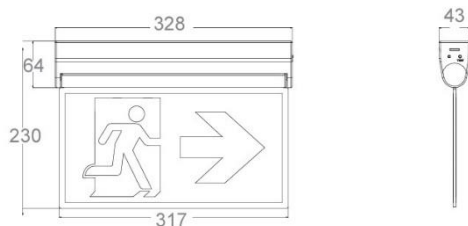

Website:

www.enov.online



LED Exit lights - Indoor Application

EPE-EX6-MT-3H

Technical Data

Module

Catalogue number	EPE-EX6-MT-3H
Duration Time	3 hours
Operating mode	M
Version	Manual Test

Details

Colour	RAL 9003
Visibility	30 m
Luminance	>150cd/m ²

Power

Active power	4W
Power supply	210/250 V AC 50/60 Hz
Power supply CB	186/254 V DC
Dimming mode	No

Standards

Temperature range	10-40°C
Material	ABS
Insulation class	2
IP	IP20
IK	IK05

Battery

Li-ion 3.7V1200mAh

Warranty

Housing & PCB - 60 months
Battery - 12 months

LED lifetime

50 000 work hours

STANDARDS

- IEC 60598-2-2:2011,
- IEC 60598-2-22:2014+A1,
- IEC 60598-1:2014+A1,
- IEC 60598-2-22:2014, AMD1:2017 used in conjunction with IEC 60598-1:2014, AMD1:2017
- EN IEC 55015:2019+A11
- EN IEC 61000-3-2:2019+A1
- EN 61000-3-3:2013+A1
- EN 61547:2009