

LED EXIT LIGHTS

LED Exit lights - Indoor Application

EVE13MT




Product Description

Economical Exit light for Ceiling application with 3 hours battery backup. EXIT written in English & Arabic pictograms included with the fitting.

Features

- Homogenized illumination
- High luminance of white contrast color >150 cd/m²
- 3.2V 600mAH LiFePO4 battery
- 3h Battery backup
- 30m viewing distance.
- Delivered with exit legends
- IP20 rating
- Robust construction, IK05
- 50000 hours lifetime
- Pictogram EXIT written in English/Arabic, running man with Right, Left and Down arrow included
- DEKRA certified
- 1 Year warranty

Dimensions:

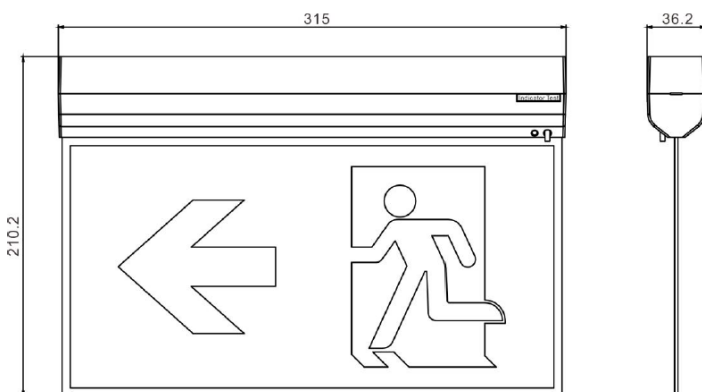

Website:
www.enov.pl



LED Exit lights - Indoor Application

EVE13MT

Technical Data

Module

Catalogue number	EVE13MT
Duration Time	3 hours
Operating mode	M
Version	Manual Test

Details

Colour	RAL 9003
Visibility	30 m
Luminance	>150cd/m ²

Power

Active power	1W
Power supply	210/250 V AC 50/60 Hz
Power supply CB	186/254 V DC
Dimming mode	No

Standards

Temperature range	10-40°C
Material	ABS
Insulation class	2
IP	IP20
IK	IK05

Battery	LiFePO ₄ 3.2V 600mAh
----------------	---------------------------------

Warranty	Housing & PCB - 60 months Battery - 12 months
-----------------	--

LED lifetime	50 000 work hours
---------------------	-------------------

STANDARDS

- IEC 60598-2-2:2011,
- IEC 60598-2-22:2014+A1,
- IEC 60598-1:2014+A1,
- IEC 60598-2-22:2014, AMD1:2017 used in conjunction with IEC 60598-1:2014, AMD1:2017
- EN IEC 55015:2019+A11
- EN IEC 61000-3-2:2019+A1
- EN 61000-3-3:2013+A1
- EN 61547:2009