

Indoor Application

LED Exit lights

EVE63AT



Product Description

- Wall / Ceiling mounted LED Emergency Light
- Suitable for Escape routing
- Easy installation
- 3 Hours of emergency backup.
- LiFePO4 battery for extended lifespan.
- Automatic test functionality.
- 30m viewing distance.
- IP40 rating

Features

- Dimension 300*195*50mm
- Input Voltage: 220-240 V AC, 50/60 Hz
- Emergency power: 4.2 W
- 3.2V 1500mAH LiFePO4 battery
- 5 Year warranty
- Colour: White

Website:

www.enov.pl



LED Exit lights

EVE63AT

Technical Data

Module

Catalogue number	EVE63AT
Duration Time	3 hours
Operating mode	Maintained / non-maintained
Version	Auto Test

Details

Colour	RAL 9003
Visibility	30 m
Lumen output	500lm
Light source	LED
Light emission	Open area / Corridor lens
Installation Type	Ceiling / Wall
Housing	Polycarbonate

Power

Active power	4.2 W
Power supply	220-240 V AC, 50/60 Hz
Dimming mode	Non-Dimmable

Installation Dimension	245*83*40 (Ceiling recessed frame)
------------------------	------------------------------------

Battery	LiFePO4 3.2V 1500mAH
---------	----------------------

Warranty	Housing & PCB - 60 months Battery - 12 months
----------	--


LED lifetime	50 000 work hours
--------------	-------------------

LED Exit lights


EVE63AT

Product Dimensions (mm):

Wall and ceiling Mounted

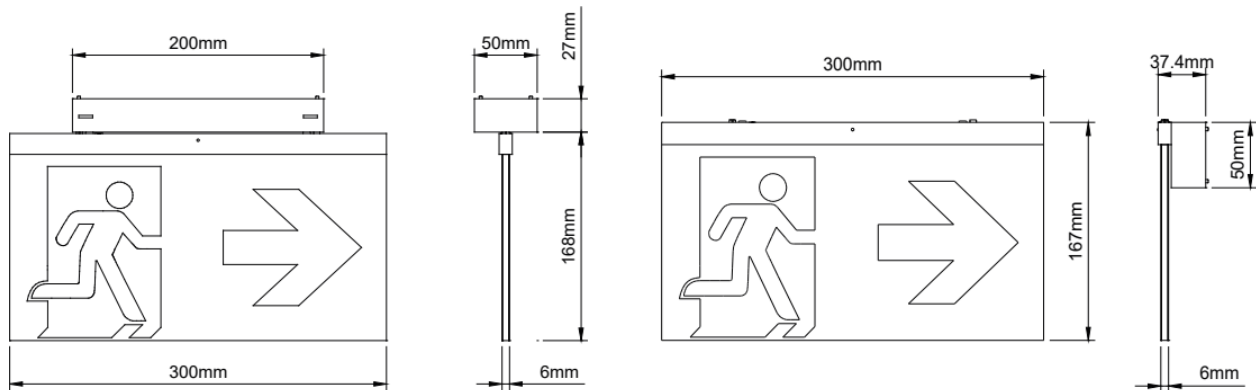

Flag and Ceiling recessed mounting (with EV56RK)

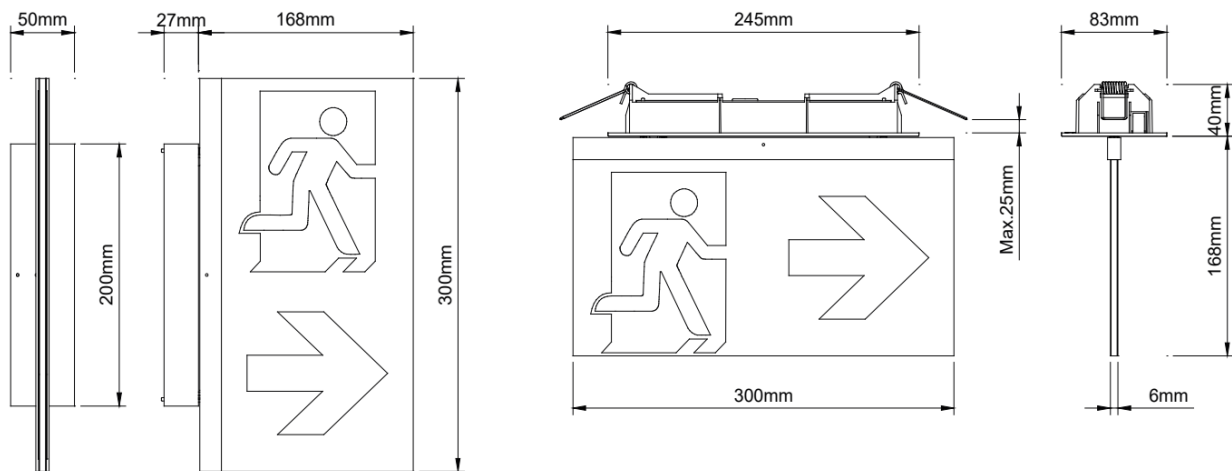

Recessing kit -EV56RK

